

TI2000-295

Male NATO to 2-pin Female Adapter



Power Anytime, Anywhere

The Tesla™ Male NATO 2-pin Female Adapter allows direct interface between the Tesla™ Cobra NATO Receptacle and the old style 2-pin NATO plug. Constructed from a rugged combination of advanced composite materials and corrosion-resistant alloys, this adapter will withstand the harshest battlefield conditions and other extreme environments.

Features:

- Rated to 3000 peak amps
- Splined to ensure a snug fit
- UV, fuel, fungus, oil, and water resistant
- Manufactured by Tesla™
- 2 Year Warranty



Tesla™ Industries, Inc.

www.teslaind.com ♦ www.tesla1.com

Email: tesla1@teslaind.com

Headquarters: (302) 324-8910

101 Centerpoint Blvd. New Castle, DE 19720

Western Regional Office: (775) 622-8801


9475 Double R Blvd. Suite 2, Reno, NV 89521




The POWER
Of
RED™



Dimensions and Technical Specifications

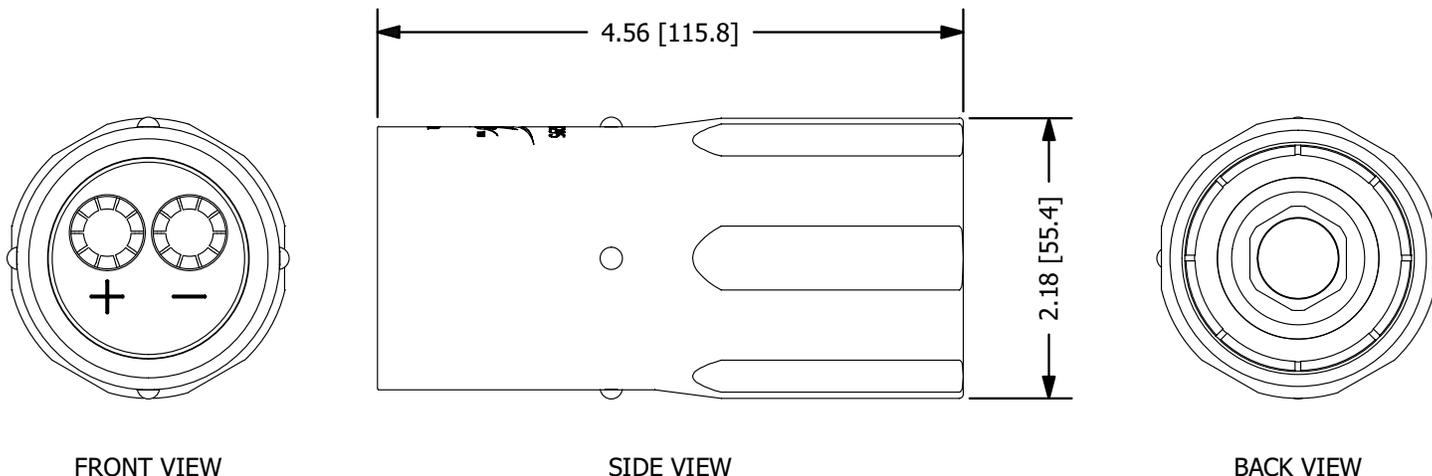

* All dimensions are in inches [millimeters]

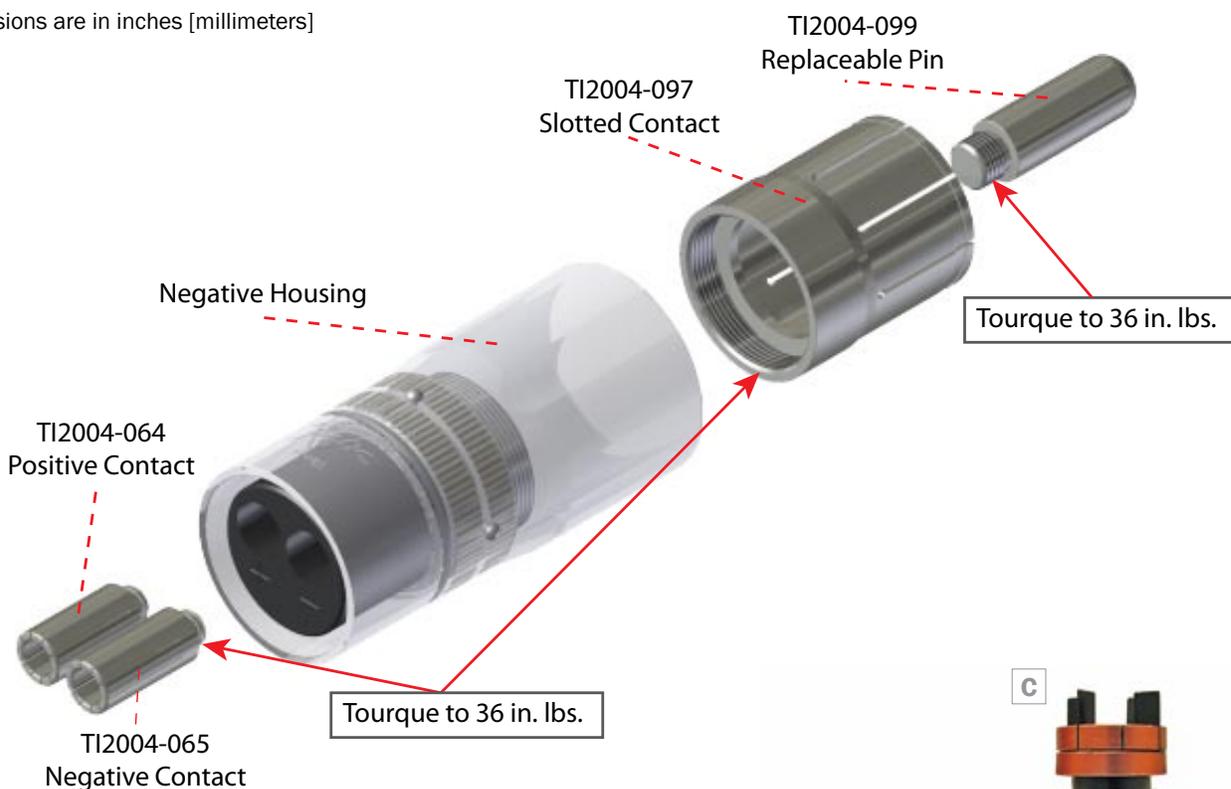

Technical Specifications:

Peak Current	3000 A
Storage Temperature	-65 °C - 125 °C (-85 °F - 257 °F)
Operating Temperature	-40 °C - 110 °C (-40 °F - 230 °F)
Rated Current	1500 A
Rated Voltage	18 - 32 Vdc
Weight	2.145 lbs (.97 kg)
Warranty	2 years (3 years optional)



C. Negative Insertion/Extraction Tool: TI2005-126
NSN: 5120-01-523-8761
D. Positive Insertion/Extraction Tool: TI27000-082
NSN: 5120-01-527-7729